

Optimal hash functions for approximate matches on the n -cube

Daniel M. Gordon, Victor S. Miller and Peter Ostapenko

Abstract—One way to find near-matches in large datasets is to use hash functions [7], [16]. In recent years locality-sensitive hash functions for various metrics have been given; for the Hamming metric projecting onto k bits is simple hash function that performs well.

In this paper we investigate alternatives to projection. For various parameters hash functions given by complete decoding algorithms for error-correcting codes work better, and asymptotically random codes perform better than projection.

I. INTRODUCTION

Given a set of M n -bit vectors, a classical problem is to quickly identify ones which are close in Hamming distance. This problem has applications in numerous areas, such as information retrieval and DNA sequence comparison. The nearest-neighbor problem is to find a vector close to a given one, while the closest-pair problem is to find the pair in the set with the smallest Hamming distance. Approximate versions of these problems allow an answer where the distance may be a factor of $(1 + \varepsilon)$ larger than the best possible.

One approach ([7], [12], [16]) is *locality-sensitive hashing* (LSH). A family of hash functions $\mathcal{H}$ is called (r, cr, p_1, p_2) -sensitive if for any two points $\mathbf{x}, \mathbf{y} \in \mathcal{V}$,

- if $d(\mathbf{x}, \mathbf{y}) \leq r$, then $\text{Prob}(h(\mathbf{x}) = h(\mathbf{y})) \geq p_1$,
- if $d(\mathbf{x}, \mathbf{y}) \geq cr$, then $\text{Prob}(h(\mathbf{x}) = h(\mathbf{y})) \leq p_2$.

Let $\rho = \log(1/p_1)/\log(1/p_2)$. An LSH scheme can be used to solve the approximate nearest neighbor problem for M points in time $O(M^\rho)$. Indyk and Motwani [14] showed that projection has $\rho = 1/c$.

The standard hash to use is projection onto k of the n coordinates [12]. An alternative family of hashes is based on minimum-weight decoding with error-correcting codes [5], [20]. A $[n, k]$ code $\mathcal{C}$ with a complete decoding algorithm defines a hash $h^{\mathcal{C}}$, where each $\mathbf{v} \in \mathcal{V} := \mathbb{F}_2^n$ is mapped to the codeword $\mathbf{c} \in \mathcal{C} \subset \mathcal{V}$ to which $\mathbf{v}$ decodes. Using linear codes for hashing schemes has been independently suggested many times; see [5], [10], and the patents [4] and [20].

In [5] the binary Golay code was suggested to find approximate matches in bit-vectors. Data is provided that suggests it is effective, but it is still not clear when the Golay or other codes work better than projection. In this paper we attempt to quantify this, using tools from coding theory.

Our model is somewhat different from the usual LSH literature. We are interested in the scenario where we have

collection of M random points of $\mathcal{V}$, one of which, $\mathbf{x}$, has been duplicated with errors. The error vector $\mathbf{e}$ has each bit nonzero with probability p . Let $P^{\mathcal{C}}(p)$ be the probability that $h^{\mathcal{C}}(\mathbf{x}) = h^{\mathcal{C}}(\mathbf{x} + \mathbf{e})$. Then the probability of collision of two points $\mathbf{x}$ and $\mathbf{y}$ is

- if $\mathbf{y} = \mathbf{x} + \mathbf{e}$, then $\text{Prob}(h(\mathbf{x}) = h(\mathbf{y})) = \tilde{p}_1 = P^{\mathcal{C}}(p)$,
- if $\mathbf{y} \neq \mathbf{x} + \mathbf{e}$, then $\text{Prob}(h(\mathbf{x}) = h(\mathbf{y})) = \tilde{p}_2 = 2^{-k}$.

Then the number of elements that hash to $h(\mathbf{x})$ will be about $M/2^k$, and the probability that one of these will be $\mathbf{y} = \mathbf{x} + \mathbf{e}$ is $P^{\mathcal{C}}(p)$. If this fails, we may try again with a new hash, say the same one applied after shifting the M points by a fixed vector, and continue until $\mathbf{y}$ is found.

Let $\rho = \log(1/\tilde{p}_1)/\log(1/\tilde{p}_2)$ as for LSH. Taking $2^k \approx M$, we expect to find $\mathbf{y}$ in time

$$\frac{M}{2^k P^{\mathcal{C}}(p)} = O(M^\rho).$$

As with LSH, we want to optimize this by minimizing ρ , i.e. finding a hash function minimizing $P^{\mathcal{C}}(p)$.

For a linear code with a complete translation-invariant decoding algorithm (so that $h(\mathbf{x}) = \mathbf{c}$ implies that $h(\mathbf{x} + \mathbf{c}') = \mathbf{c} + \mathbf{c}'$), studying $P^{\mathcal{C}}$ is equivalent to studying the properties of the set $\mathcal{S}$ of all points in $\mathcal{V}$ that decode to $\mathbf{0}$. In Section III and the appendix we systematically investigate sets of size ≤ 64 .

Suppose that we pick a random $\mathbf{x} \in \mathcal{S}$. Then the probability that $\mathbf{y} = \mathbf{x} + \mathbf{e}$ is in $\mathcal{S}$ is

$$P_{\mathcal{S}}(p) = \frac{1}{|\mathcal{S}|} \sum_{\mathbf{x}, \mathbf{y} \in \mathcal{S}} p^{d(\mathbf{x}, \mathbf{y})} (1-p)^{n-d(\mathbf{x}, \mathbf{y})}. \quad (1)$$

This function has been studied extensively in the setting of error-detecting codes [17]. In that literature, $\mathcal{S}$ is a code, $P_{\mathcal{S}}(p)$ is the probability of an undetected error, and the goal is to minimize this probability. Here, on the other hand, we will call a set *optimal* for p if no set in $\mathcal{V}$ of size $|\mathcal{S}|$ has greater probability.

As the error rate p approaches $1/2$, this coincides with the definition of *distance-sum optimal sets*, which were first studied by Ahlswede and Katona [1].

The error exponent of a code $\mathcal{C}$ is

$$E^{\mathcal{C}}(p) = -\frac{1}{n} \lg P^{\mathcal{C}}(p).$$

In this paper $\lg$ denotes log to base 2. We are interested in properties of the error exponent over codes of rate $R = k/n$ as $n \rightarrow \infty$. Note that $\rho = E^{\mathcal{C}}(p)/R$, so minimizing the error exponent will give us the best code to use for finding closest pairs. In Section IV we will show that hash functions from random (nonlinear) codes have a better error exponent than projection.

D. Gordon and P. Ostapenko are with the IDA Center for Communications Research, 4320 Westerra Court, San Diego, 92121

V. Miller is with the IDA Center for Communications Research, 805 Bunn Drive, Princeton, New Jersey 08540

II. HASH FUNCTIONS FROM CODES

For a set $\mathcal{S} \subset \mathcal{V}$, let

$$A_i = \#\{(\mathbf{x}, \mathbf{y}) : \mathbf{x}, \mathbf{y} \in \mathcal{S} \text{ and } d(\mathbf{x}, \mathbf{y}) = i\}$$

count the number of pairs of words in $\mathcal{S}$ at distance i . The *distance distribution function* is

$$A(\mathcal{S}, \zeta) := \sum_{i=0}^n A_i \zeta^i. \quad (2)$$

This function is directly connected to $P_{\mathcal{S}}(p)$ [17]. If $\mathbf{x}$ is a random element of $\mathcal{S}$, and $\mathbf{y} = \mathbf{x} + \mathbf{e}$, where $\mathbf{e}$ is an error vector where each bit is nonzero with probability p , then the probability that $\mathbf{y} \in \mathcal{S}$ is

$$\begin{aligned} P_{\mathcal{S}}(p) &:= \frac{1}{|\mathcal{S}|} \sum_{\mathbf{x}, \mathbf{y} \in \mathcal{S}} p^{d(\mathbf{x}, \mathbf{y})} (1-p)^{n-d(\mathbf{x}, \mathbf{y})} \\ &= \frac{1}{|\mathcal{S}|} \sum_{i=0}^n A_i p^i (1-p)^{n-i} \\ &= \frac{(1-p)^n}{|\mathcal{S}|} A\left(\mathcal{S}, \frac{p}{1-p}\right). \end{aligned} \quad (3)$$

In this section we will evaluate (3) for projection and for perfect codes, and then consider other linear codes.

A. Projection

The simplest hash is to project vectors in $\mathcal{V}$ onto k coordinates. Let k -*projection* denote the $[n, k]$ code $\mathcal{P}_{n,k}$ corresponding to this hash. The associated $\mathcal{S}$ of vectors mapped to $\mathbf{0}$ is an 2^{n-k} -subcube of $\mathcal{V}$. The distance distribution function is

$$A(\mathcal{S}, \zeta) = (2(1 + \zeta))^{n-k}, \quad (4)$$

so the probability of collision is

$$P^{\mathcal{P}_{n,k}}(p) = \frac{(1-p)^n}{2^{n-k}} \left(\frac{2}{1-p} \right)^{n-k} = (1-p)^k. \quad (5)$$

$\mathcal{P}_{n,k}$ is not a good error-correcting code, but for sufficiently small error probability its hash function is optimal.

Theorem 1: Let $\mathcal{S}$ be the 2^{n-k} -subcube of $\mathcal{V}$. For any error probability $p \in (0, 2^{-2(n-k)})$, $\mathcal{S}$ is an optimal set, and so k -projection is an optimal hash.

Proof: The distance distribution function for $\mathcal{S}$ is

$$A(\mathcal{S}, \zeta) = 2^{n-k} (1 + \zeta)^{n-k}.$$

The edge isoperimetric inequality for an n -cube [13] states that

Lemma 2: Any subset S of the vertices of the n -dimensional cube Q_n has at most

$$\frac{1}{2} |S| \lg |S|$$

edges between vertices in S , with equality if and only if S is a subcube.

Any set $\mathcal{S}'$ with 2^{n-k} points has distance distribution function

$$A(\mathcal{S}', \zeta) = \sum_{i=0}^k c_i \zeta^i,$$

where $c_0 = 2^{n-k}$, $c_1 < (n-k)2^{n-k}$ by Lemma 2, and the sum of the c_i 's is $2^{2(n-k)}$. By (5) the probability of collision is $(1-p)^n 2^{n-k} A(\mathcal{S}', p/(1-p))$.

$$\begin{aligned} A(\mathcal{S}', \zeta) &\leq 2^{n-k} + \zeta((n-k)2^{n-k} - 1) \\ &\quad + \zeta^2 \left(2^{2(n-k)} - (n-k+1)2^{n-k} + 1 \right), \end{aligned}$$

and

$$\begin{aligned} A(\mathcal{S}, \zeta) - A(\mathcal{S}', \zeta) &\geq \zeta - \zeta^2 \left(2^{2(n-k)} + 2^{n-k-1} (n-k^2 + n-k+2) + 1 \right) \\ &> \zeta - \zeta^2 (2^{2(n-k)} - 1). \end{aligned}$$

This is positive if $p < 1/2$ and $(1-p)/p > 2^{2(n-k)} - 1$, i.e., for $p < 2^{-2(n-k)}$. ■

B. Concatenated Hashes

Here we show that if h and h' are good hashes, then the concatenation is as well. First we identify $\mathcal{C}$ with $\mathbb{F}_2^k$ and treat $h^{\mathcal{C}}$ as a hash h from $\mathbb{F}_2^n \rightarrow \mathbb{F}_2^k$. We denote $P^{\mathcal{C}}$ by P^h . From $h : \mathbb{F}_2^n \rightarrow \mathbb{F}_2^k$ and $h' : \mathbb{F}_2^{n'} \rightarrow \mathbb{F}_2^{k'}$, we get a concatenated hash $(h, h') : \mathbb{F}_2^{n+n'} \rightarrow \mathbb{F}_2^{k+k'}$.

Lemma 3: Fix $p \in (0, 1/2)$. Let h and h' be hashes. Then

$$\min\{E^h(p), E^{h'}(p)\} \leq E^{(h,h')}(p) \leq \max\{E^h(p), E^{h'}(p)\},$$

with strict inequalities if $E^h(p) \neq E^{h'}(p)$.

Proof: Since p is fixed, we drop it from the notation. Suppose $E^h \leq E^{h'}$. Then

$$\frac{\lg P^h}{n} \leq \frac{\lg P^h + \lg P^{h'}}{n+n'} \leq \frac{\lg P^{h'}}{n'}.$$

Since $P^{(h,h')} = P^h P^{h'}$, we have $E^h \leq E^{(h,h')} \leq E^{h'}$. ■

C. Perfect Codes

An e -sphere around a vector $\mathbf{x}$ is the set of all vectors $\mathbf{y}$ with $d(\mathbf{x}, \mathbf{y}) \leq e$. An $[n, k, 2e+1]$ code is *perfect* if the e -spheres around codewords cover $\mathcal{V}$. Minimum weight decoding with perfect codes is a reasonable starting point for hashing schemes, since all vectors are closest to a unique codeword. The only perfect binary codes are trivial repetition codes, the Hamming codes, and the binary Golay code. Repetition codes do badly, but the other perfect codes give good hash functions.

1) *Binary Golay Code:* The $[23, 12, 7]$ binary Golay code $\mathcal{G}$ is an important perfect code. The 3-spheres around each code codeword cover $\mathbb{F}_2^{23}$. The 3-sphere around $\mathbf{0}$ in the 23-cube has distance distribution function

$$\begin{aligned} 2048 + 11684\zeta + 128524\zeta^2 + 226688\zeta^3 \\ + 1133440\zeta^4 + 672980\zeta^5 + 2018940\zeta^6. \end{aligned}$$

From this we find $E^{\mathcal{G}}(p) > E^{\mathcal{P}_{23,12}}(p)$ for $p \in (0.2555, 1/2)$.

TABLE I
CROSSOVER ERROR PROBABILITIES p FOR HAMMING CODES $\mathcal{H}_m$.

m	k	p
4	11	0.2826
5	26	0.1518
6	57	0.0838
7	120	0.0468

2) *Hamming Codes*: Aside from the repetition codes and the Golay code, the only perfect binary codes are the Hamming codes. The $[2^m-1, 2^m-m-1, 3]$ Hamming code $\mathcal{H}_m$ corrects one error.

The distance distribution function for a 1-sphere is

$$2^m + 2(2^m - 1)\zeta + (2^m - 1)(2^m - 2)\zeta^2, \quad (6)$$

so the probability of collision $P^{\mathcal{H}_m}(p)$ is

$$\begin{aligned} \frac{(1-p)^{2^m-1}}{2^m} (2^m + 2(2^m - 1)\frac{p}{1-p} \\ + (2^m - 1)(2^m - 2)\frac{p^2}{(1-p)^2}) \end{aligned} \quad (7)$$

Table I gives the crossover error probabilities where the first few Hamming codes become better than projection.

Theorem 4: For any $m > 4$ and $p > m/(2^m - m)$, the Hamming code $\mathcal{H}_m$ beats $(2^m - m - 1)$ -projection.

Proof: The difference between the distribution functions of the cube and the 1-sphere in dimension $2^m - 1$ is

$$\begin{aligned} f_m(\zeta) &:= A(\mathcal{S}, \zeta) - A(\mathcal{H}_m, \zeta) \\ &= 2^m(1 + \zeta)^m \\ &\quad - (2^m + 2(2^m - 1)\zeta + (2^m - 1)(2^m - 2)\zeta^2). \end{aligned} \quad (8)$$

We will show that, for $m \geq 4$, $f_m(\zeta)$ has exactly one root in $(0, 1)$, denoted by α_m , and that $\alpha_m \in ((m-2)/2^m, m/2^m)$.

We calculate

$$\begin{aligned} f_m(\zeta) &= ((m-2)2^m + 1)\zeta \\ &\quad - \left(2^{2m} - \left(3 + \binom{m}{2}\right)2^m + 2\right)\zeta^2 \\ &\quad + 2^m \sum_{i=3}^m \binom{m}{i} \zeta^i. \end{aligned}$$

All the coefficients of $f_m(\zeta)$ are non-negative with the exception of the coefficient of ζ^2 , which is negative for $m \geq 2$. Thus, by Descartes' rule of signs $f(\zeta)$ has 0 or 2 positive roots. However, it has a root at $\zeta = 1$. Call the other positive root α_m . We have $f_m(0) = f_m(1) = 0$, and since $f'(0) = (m-2)2^m + 2 > 0$ and $f'(1) = 2^{2m-1}(m-4) + 2^{m+2} - 2 > 0$ for $m \geq 4$, we must have $\alpha_m < 1$ for $m \geq 4$.

For $p > \alpha_m$ the Hamming code $\mathcal{H}_m$ beats projection.

Using (8) and Bernoulli's inequality, it is easy to show that $f_m(\zeta) > 0$ for $\zeta < c(m-2)/2^m$ for any $c < 1$ and $m \geq 4$. For the other direction, we may use Taylor's theorem to show

$$2^m \left(1 + \frac{m}{2^m}\right)^m < 2^m + m^2 + \frac{m^4}{2^{m+1}} \left(1 + \frac{m}{2^m}\right)^{m-2}.$$

Plugging this into (8), we have that $f_m(m/2^m) < 0$ for $m > 6$.

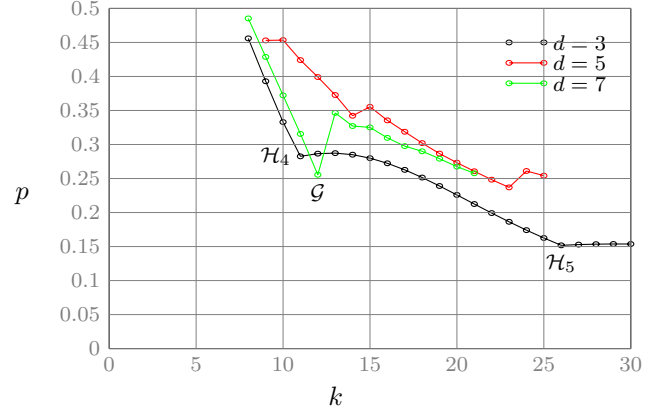


Fig. 1. Crossover error probabilities for minimum length linear codes.

D. Other Linear Codes

The above codes give hashing strategies for a few values of n and k , but we would like hashes for a wider range. For a hashing strategy using error-correcting codes, we need a code with an efficient *complete decoding* algorithm; that is a way to map every vector to a codeword. Given a translation invariant decoder, we may determine $\mathcal{S}$, the set of vectors that decode to $\mathbf{0}$, in order to compare strategies as the error probability changes.

Magma [6] has a built-in database of linear codes over $\mathbb{F}_2$ of length up to 256. Most of these do not come with efficient complete decoding algorithms, but magma does provide syndrome decoding. Using this database new hashing schemes were found. For each dimension k and minimum distance d , an $[n, k, d]$ binary linear code with minimum length n was chosen for testing.¹ (This criterion excludes any codes formed by concatenating with a projection code.) For each code there is an error probability above which the code beats projection. Figure 1 shows these crossover probabilities. Not surprisingly, the $[23, 12, 7]$ Golay code $\mathcal{G}$ and Hamming codes $\mathcal{H}_4$ and $\mathcal{H}_5$ all do well. The facts that concatenating the Golay code with projection beats the chosen code for $13 \leq k \leq 17$ and concatenating $\mathcal{H}_m$ with projection beats the chosen codes for $27 \leq k \leq 30$ show that factors other than minimum length are important in determining an optimal hashing code.

As linear codes are subspaces of $\mathbb{F}_2^n$, lattices are subspaces of $\mathbb{R}^n$. The 24-dimensional Leech lattice is closely related to the Golay code, and also has particularly nice properties. It was used in [2] to construct a good LSH for $\mathbb{R}^n$.

III. OPTIMAL SETS

In the previous section we looked at the performances of sets associated with various good error-correcting codes. However, the problem of determining optimal sets $\mathcal{S} \subset \mathbb{F}_2^n$ is of independent interest.

The general question of finding an optimal set of size 2^t in $\mathcal{V}$ for an error probability p is quite hard. In this section we will find the answer for $t \leq 6$, and look at what happens when p is near $1/2$.

¹The magma call `BLLC(GF(2), k, d)` was used to choose a code.

A. Optimal Sets of Small Size

For a vector $\mathbf{x} = (x_1, \dots, x_n) \in \mathcal{V}$, let $r_i(\mathbf{x})$ be $\mathbf{x}$ with the i -th coordinate complemented, and let $s_{ij}(\mathbf{x})$ be $\mathbf{x}$ with the i -th and j -th coordinates switched.

Definition 5: Two sets are isomorphic if one can be gotten from the other by a series of r_i and s_{ij} transformations.

Lemma 6: If $\mathcal{S}$ and $\mathcal{S}'$ are isomorphic, then $P_{\mathcal{S}}(p) = P_{\mathcal{S}'}(p)$ for all $p \in [0, 1]$.

The corresponding non-invertible transformation are:

$$\begin{aligned} \rho_i(\mathbf{x}) &:= (x_1, x_2, \dots, x_{i-1}, 0, x_{i+1}, \dots, x_n), \\ \sigma_{ij}(\mathbf{x}) &:= \begin{cases} \mathbf{x}, & x_{\min(i,j)} = 0, \\ s_{ij}(\mathbf{x}), & x_{\min(i,j)} = 1. \end{cases} \end{aligned} \quad (9)$$

Definition 7: A set $\mathcal{S} \subset \mathcal{V}$ is a *down-set* if $\rho_i(\mathcal{S}) \subset \mathcal{S}$ for all $i \leq n$.

Definition 8: A set $\mathcal{S} \subset \mathcal{V}$ is *right-shifted* if $\sigma_{ij}(\mathcal{S}) \subset \mathcal{S}$ for all $i, j \leq n$.

Theorem 9: If a set $\mathcal{S}$ is optimal, then it is isomorphic to a right-shifted down-set.

Proof: We will show that any optimal set is isomorphic to a right-shifted set. The proof that it must be isomorphic to a down-set as well is similar. A similar proof for distance-sum optimal sets (see Section III-B) was given by Kündgen in [18].

Recall that

$$P_{\mathcal{S}}(p) = \frac{(1-p)^n}{|\mathcal{S}|} \sum_{\mathbf{x}, \mathbf{y} \in \mathcal{S}} \zeta^{d(\mathbf{x}, \mathbf{y})},$$

where $\zeta = p/(1-p) \in (0, 1)$. If $\mathcal{S}$ is not right-shifted, there is some $\mathbf{x} \in \mathcal{S}$ with $x_i = 1$, $x_j = 0$, and $i < j$. Let $\varphi_{ij}(\mathcal{S})$ replace all such sets $\mathbf{x}$ with $s_{ij}(\mathbf{x})$. We only need to show that this will not decrease $P_{\mathcal{S}}(p)$.

Consider such an $\mathbf{x}$ and any $\mathbf{y} \in \mathcal{S}$. If $y_i = y_j$, then $d(\mathbf{x}, \mathbf{y}) = d(s_{ij}(\mathbf{x}), \mathbf{y})$, and $P_{\mathcal{S}}(p)$ will not change. If $y_i = 0$ and $y_j = 1$, then $d(\mathbf{x}, \mathbf{y}) = d(s_{ij}(\mathbf{x}), \mathbf{y}) - 2$, and since $\zeta^{l-2} \geq \zeta^l$, that term's contribution to $P_{\mathcal{S}}(p)$ increases.

Suppose $y_i = 1$ and $y_j = 0$. If $s_{ij}(\mathbf{y}) \in \mathcal{S}$, then $d(\mathbf{x}, \mathbf{y}) + d(\mathbf{x}, s_{ij}(\mathbf{y})) = d(s_{ij}(\mathbf{x}), \mathbf{y}) + d(s_{ij}(\mathbf{x}), s_{ij}(\mathbf{y}))$, and $P_{\mathcal{S}}(p)$ is unchanged. Otherwise, $\varphi_{ij}(\mathcal{S})$ will replace $\mathbf{y}$ by $s_{ij}(\mathbf{y})$, and $d(\mathbf{x}, \mathbf{y}) = d(s_{ij}(\mathbf{x}), s_{ij}(\mathbf{y}))$ means that $P_{\mathcal{S}}(p)$ will again be unchanged. ■

Let $R_{s,n}$ denote an optimal set of size s in $\mathbb{F}_2^n$. By computing all right-shifted down-sets of size 2^t , for $t \leq 6$, we have the following result:

Theorem 10: The optimal sets $R_{2^t,n}$ for $t \in \{1, \dots, 6\}$ correspond to Tables IV [pg. 7] and V [pg. 8].

These figures, and details of the computations, are given the Appendix. Some of the optimal sets for $t = 6$ do better than the sets corresponding to the codes in Figure 1.

B. Optimal Sets for Large Error Probabilities

Theorem 1 states that for any n and k , for a sufficiently small error probability p , a 2^{n-k} -subcube is an optimal set. One may also ask what an optimal set is at the other extreme, a large error probability. In this section we use existing results about minimum average distance subsets to list additional sets that are optimal as $p \rightarrow 1/2^-$.

We have

$$\begin{aligned} P_{\mathcal{S}}(p) &:= \frac{(1-p)^n}{|\mathcal{S}|} A\left(\mathcal{S}, \frac{p}{1-p}\right) \\ &= \frac{1}{|\mathcal{S}|} \sum_i A_i p^i (1-p)^{n-i}. \end{aligned}$$

Letting $p = 1/2 - \varepsilon$ and $s = |\mathcal{S}|$, $P_{\mathcal{S}}(\gamma)$ becomes

$$\begin{aligned} &s^{-1} \sum_i A_i (1/2 - \varepsilon)^i (1/2 + \varepsilon)^{n-i} \\ &= \frac{1}{s 2^n} \left(\sum_i A_i + \varepsilon \left(\sum_i 2(n-2i) A_i \right) + O(\varepsilon^2) \right) \\ &= \frac{s}{2^n} (1 + 2n\varepsilon) - \frac{4\varepsilon}{s 2^n} \sum_i i A_i + O(\varepsilon^2). \end{aligned}$$

Therefore, an optimal set for $p \rightarrow 1/2^-$ must minimize the distance-sum of $\mathcal{S}$

$$d(\mathcal{S}) := \frac{1}{2} \sum_{\mathbf{x}, \mathbf{y} \in \mathcal{S}} d(\mathbf{x}, \mathbf{y}) = \frac{1}{2} \sum_i i A_i. \quad (10)$$

Denote the minimal distance sum by

$$f(s, n) := \min \{d(\mathcal{S}) : \mathcal{S} \subset \mathbb{F}_2^n, |\mathcal{S}| = s\}.$$

If $d(\mathcal{S}) = f(s, n)$ for a set $\mathcal{S}$ of size s , we say that $\mathcal{S}$ is *distance-sum optimal*. The question of which sets are distance-sum optimal was proposed by Ahlswede and Katona in 1977; see Kündgen [18] for references and recent results.

This question is also difficult. Kündgen presents distance-sum optimal sets for small s and n , which include the ones of size 16 from Table IV. Jaeger et al. [15] found the distance-sum optimal set for n large.

Theorem 11: (Jaeger, et al. [15], cf. [18, pg. 151]) For $n \geq s - 1$, a generalized 1-sphere (with s points) is distance-sum optimal unless $s \in \{4, 8\}$ (in which case the subcube is optimal).

From this we have:

Corollary 12: For $n \geq 2^t - 1$, with $t \geq 4$ and p sufficiently close to $1/2$, a $(2^t - 1)$ -dimensional 1-sphere is hashing optimal.

IV. HASHES FROM RANDOM CODES

In this section we will show that hashes from random codes under minimum weight decoding² perform better than projection. Let $R = k/n$ be the rate of a code. The error exponent for k -projection, $E^{\mathcal{P}_{n,k}}(p)$, is

$$-\frac{1}{n} \lg \mathcal{P}^{n,k}(p) = -\frac{1}{n} \lg(1-p)^k = -R \lg(1-p). \quad (11)$$

Theorem 4 shows that for any $p > 0$ there are codes with rate $R \approx 1$ which beat projection. For any fixed R , we will bound the expected error exponent for a random code $\mathcal{R}$ of rate R , and show that it beats (11).

Let H be the binary entropy

$$H(\delta) := -\delta \lg \delta - (1-\delta) \lg(1-\delta). \quad (12)$$

Fix $\delta \in [0, 1/2]$. Let $d := \lfloor \delta n \rfloor$, let $\mathcal{S}_d(\mathbf{x})$ denote the sphere of radius d around $\mathbf{x}$, and let $V(d) := |\mathcal{S}_d(\mathbf{x})|$.

²Ties arising in minimum weight decoding are broken in some unspecified manner.

It is elementary to show (see [11], Exercise 5.9):

Lemma 13: Let $\mathcal{R}$ be a random code of length n and rate R , where n is sufficiently large. For $\mathbf{c} \in \mathcal{R}$, the probability that a given vector $\mathbf{x} \in \mathcal{S}_d(\mathbf{c})$ is closer to another codeword than $\mathbf{c}$ is at most

$$2^{n(H(\delta)-1+R)}.$$

Lemma 13 implies that if $H(\delta) < 1 - R$ (the Gilbert-Varshamov bound), then with high probability, any given $\mathbf{x} \in \mathcal{S}_d(\mathbf{c})$ will be decoded to $\mathbf{c}$. For the rest of this section we will assume this bound, so that Lemma 13 applies.

Let $P^{\mathcal{R}}(p)$ be the probability that a random point $\mathbf{x}$ and $\mathbf{x} + \mathbf{e}$ both hash to $\mathbf{c}$. This is greater than the probability that $\mathbf{x} + \mathbf{e}$ has weight exactly d , so

$$P^{\mathcal{R}}(p) > \sum_{i=0}^d \binom{d}{i} \binom{n-d}{i} p^{2i} (1-p)^{n-2i}.$$

Theorem 4 of [3] gives a bound for this:

Theorem 14: For any $\varepsilon \leq 1/2$ and δ such that $H(\delta) < 1 - R$ and $\varepsilon \leq 2\delta$,

$$\begin{aligned} -E^{\mathcal{R}}(p) &\geq \varepsilon \lg p + (1-\varepsilon) \lg(1-p) \\ &\quad + \delta H\left(\frac{\varepsilon}{2\delta}\right) + (1-\delta) H\left(\frac{\varepsilon}{2(1-\delta)}\right) \end{aligned}$$

for any $\varepsilon \leq 1/2$. The right hand side is maximized at $\varepsilon_{\max}$ satisfying

$$\frac{(2\delta - \varepsilon_{\max})(2(1-\delta) - \varepsilon_{\max})}{\varepsilon_{\max}^2} = \frac{(1-p)^2}{p^2}.$$

Define

$$\begin{aligned} D(p, \delta, \varepsilon) &:= \varepsilon \lg p + (1-\varepsilon) \lg(1-p) + \delta H\left(\frac{\varepsilon}{2\delta}\right) \\ &\quad + (1-\delta) H\left(\frac{\varepsilon}{2(1-\delta)}\right) \\ &\quad - (1-H(\delta)) \lg(1-p). \end{aligned}$$

Then $E^{\mathcal{P}_{n,k}}(p) - E^{\mathcal{R}}(p) \geq D(p, \delta, \varepsilon)$.

Theorem 15: $D(p, \delta, \varepsilon_{\max}) > 0$ for any $\delta, p \in (0, 1/2)$.

Proof: Fix $\delta \in (0, 1/2)$, and let $f(p) := D(p, \delta, \varepsilon_{\max})$.

It is easy to check that:

$$\begin{aligned} \lim_{p \rightarrow 0^+} f(p) &= 0, \\ \lim_{p \rightarrow 1/2^-} f(p) &= 0, \\ \lim_{p \rightarrow 0^+} f'(p) &> 0, \\ \lim_{p \rightarrow 1/2^-} f'(p) &< 0, \end{aligned}$$

Therefore, it suffices to show that $f'(p)$ has only one zero in $(0, 1/2)$. Observe that $\varepsilon_{\max}$ is chosen so that $\frac{\partial D}{\partial \varepsilon}(\delta, p, \varepsilon_{\max}) = 0$. Hence

$$\begin{aligned} f'(p) &= \frac{\partial D}{\partial p}(\delta, p, \varepsilon_{\max}) \\ &= \frac{\varepsilon_{\max}}{p \log(2)} - \frac{1 - \varepsilon_{\max}}{(1-p) \log(2)} + \frac{1 - H(\delta)}{(1-p) \log(2)}, \end{aligned}$$

so

$$\log(2) f'(p) = \frac{\varepsilon_{\max}}{p} - \frac{1 - \varepsilon_{\max}}{1-p} + \frac{1 - H(\delta)}{1-p}.$$

Therefore $f'(p) = 0$ when $\varepsilon_{\max} = pH(\delta)$. From Theorem 14 we find

$$p = \frac{4\delta(1-\delta) - H(\delta)^2}{2(H(\delta) - H(\delta)^2)}.$$

■

Thus we have $E^{\mathcal{P}_{n,k}}(p) > E^{\mathcal{R}}(p)$, and so:

Corollary 16: For any $p \in (0, 1/2)$, $R \in (0, 1)$ and n sufficiently large, the expected probability of collision for a random code of rate R is higher than projection.

ACKNOWLEDGEMENTS.

The authors would like to thank William Bradley, David desJardins and David Moulton for stimulating discussions which helped initiate this work. Also, Tom Dorsey and Amit Khetan provided the simpler proof of Theorem 15 given here. The anonymous referees made a number of good suggestions that improved the paper, particularly the exposition in the introduction.

APPENDIX

By Theorem 9, we may find all optimal sets by examining all right-shifted down-sets. Right-shifted down-sets correspond to ideals in the poset whose elements are in $\mathbb{F}_2^n$ and with partial order $\mathbf{x} \preceq \mathbf{y}$ if $\mathbf{x}$ can be obtained from $\mathbf{y}$ by a series of ρ_i (9) and σ_{ij} (10) operations. It turns out that there are not too many such ideals, and they may be computed efficiently.

Our method for producing the ideals is not new, but since the main references are unpublished, we describe them briefly here. In Section 4.12.2 of [19], Ruskey describes a procedure GenIdeal for listing the ideals in a poset $\mathcal{P}$. Let $\downarrow \mathbf{x}$ denote all the elements $\preceq \mathbf{x}$, and $\uparrow \mathbf{x}$ denote all the elements $\succeq \mathbf{x}$.

procedure GenIdeal($\mathcal{Q}$: Poset, I : Ideal)

local $\mathbf{x}$: PosetElement

begin

if $\mathcal{Q} = \emptyset$ **then** PrintIt(I);

else

$\mathbf{x} :=$ some element in $\mathcal{Q}$;
GenIdeal($\mathcal{Q} - \downarrow \mathbf{x}$, $I \cup \downarrow \mathbf{x}$);
GenIdeal($\mathcal{Q} - \uparrow \mathbf{x}$, I);

end

The idea is to start with I empty, and $\mathcal{Q} = \mathcal{P}$. Then for each $\mathbf{x}$, an ideal either contains $\mathbf{x}$, in which case it will be found by the first call to GenIdeal, or it does not, in which case the second call will find it.

Finding $\uparrow \mathbf{x}$ and $\downarrow \mathbf{x}$ may be done efficiently if we precompute two $|\mathcal{P}| \times |\mathcal{P}|$ incidence matrices representing these sets for each element of $\mathcal{P}$. This precomputation takes time $O(|\mathcal{P}|^2)$, and then the time per ideal is $O(|\mathcal{P}|)$. This is independent of the choice of $\mathbf{x}$. Squire (see [19] for details) realized that, by picking $\mathbf{x}$ to be the middle element of $\mathcal{Q}$ in some linear extension, the time per ideal can be shown to be $O(\lg |\mathcal{P}|)$.

We are only interested in down-sets that are right-shifted and also are of fairly small size. The feasibility of our computations involves both issues. In particular, within GenIdeal we may restrict to $\mathbf{x} \in \mathbb{F}_2^n$ with $\text{Size}(\downarrow \mathbf{x})$ no more than the target size of the set we are looking for. If we were using

TABLE II
NUMBER OF RIGHT-SHIFTED DOWN-SETS

size	number	size	number	size	number
2	1	11	13	21	199
3	1	12	18	22	260
4	2	13	23	23	334
5	2	14	31	24	433
6	3	15	40	32	3140
7	4	16	54	48	130979
8	6	17	69	64	4384627
9	7	18	91		
10	10	19	118		
		20	155		

TABLE III
OPTIMAL RIGHT-SHIFTED DOWN-SETS $R_{64,n}$ BEATING KNOWN CODES.
(THERE ARE NO SUCH DOWN-SETS $R_{2^t,n}$ FOR $t \leq 5$.)

k	n	cross	$R_{64,n}$
6	12	0.487	$\langle 2^{11}, 2^{10} + 2^9, 3 \cdot 2^8 \rangle$
7	13	0.470	$\langle 2^{12}, 2^{10} + 2^4, 3 \cdot 2^8 \rangle$
8	14	0.439	$\langle 2^{13} + 2^2, 2^{13} + 3, 2^3 + 2^2 + 1 \rangle$
9	15	0.391	$\langle 2^{14} + 3, 2^{10} + 2^2 \rangle$
16	22	0.244	$\langle 2^{21} + 2 \rangle$
17	23	0.242	$\langle 2^{22} + 1, 2^{19} + 2 \rangle$
18	24	0.238	$\langle 2^{23} + 1, 2^{17} + 2 \rangle$
19	25	0.231	$\langle 2^{24} + 1, 2^{15} + 2 \rangle$
20	26	0.222	$\langle 2^{25} + 1, 2^{13} + 2 \rangle$
21	27	0.212	$\langle 2^{26} + 1, 2^{11} + 2 \rangle$

GenIdeal with the poset whose ideals correspond to down-sets of size 64 in $\mathbb{F}_2^{63}$, there would be 83,278,001 such $\mathbf{x}$ to consider. However, for our situation with right-shifted down-sets, there are only 257 such $\mathbf{x}$ and the problem becomes quite manageable. Furthermore, instead of stopping when $\mathcal{Q}$ is empty, we stop when I is at or above the desired size.

Table II gives the number of right-shifted down-sets of different sizes. The computation for size 32 sets took just over a second on one processor of an HP Superdome. Size 64 sets took 23 minutes. Let $R_{s,n}$ refer to an optimal set of size s in $\mathbb{F}_2^n$. Tables IV and V list $R_{2^t,n}$ for all $t \leq 6$ and all $n < 2^t$.

Several features of Tables IV and V require explanation. First we identify the binary expansion $x = \sum_{i < n} 2^i x_{n-i}$ with the vector $\mathbf{x} = (x_1, \dots, x_n)$. Second, for each optimal right-shifted down-set $R_{2^t,n}$ we have listed a minimal set of generators. For example $\langle 2^4 - 1 \rangle$ corresponds to the 4-dimensional cube while $\langle 2^{14} \rangle$, as a subset of $\mathbb{F}_2^{15}$, corresponds to the 15-dimensional 1-sphere.

For each set p_{cross} indicates the crossover value for p at which point that set performs better than any preceding entry in the table. For example, the 4-dimensional cube $\langle 2^4 - 1 \rangle$ is optimal for all $p \in (0, 0.5)$ if $4 \leq n \leq 11$ but is only optimal for $p \in (0, 0.4560)$ if $n = 12$. For $(t, n) = (4, 13)$, the 4-dimensional cube is optimal for $p \in (0, 0.3929)$ while the right-shifted down-set $\langle 2^{12}, 2^2 + 1 \rangle$ is optimal for $p \in (0.3929, 0.5)$.

There are several specific (t, n) for which more than two nonisomorphic right-shifted down-sets are optimal. In several cases the nonisomorphic optimal right-shifted down-sets have the same distance distribution. (The two nonisomorphic sets $R_{2^4,12}$ were originally found by Kündgen [18, pg. 160:

Table 1].) In other cases different sets are optimal for different values of p . (Such cases are highlighted with a box $\boxed{\cdot}$.) For example, with $(t, n) = (5, 19)$, the 5-dimensional cube $\langle 2^5 - 1 \rangle$ is optimal for $p \in (0, 0.2826)$, $\langle 2^{15} + 1 \rangle$ is optimal on $(0.2826, 0.3333)$, while $\langle 2^{18}, 2^{12} + 1 \rangle$ is optimal on $(0.3333, 0.5)$. Somewhat similar situations involve $t = 6$ and $n \in \{19, 28, 29, 35, 36, 37, 38, 58, 59\}$.³ For $t \leq 6$ and for any n , there are at most three different optimal sets.

Some of the optimal sets $R_{64,n}$ are better than those for any known hash function. Table III gives the best known sets for each k , and their generators.

Tilings of binary spaces have also been studied [8]. Indeed a complete translation-invariant decoding algorithm leads to a tiling of the n -cube. Recently the second author and Coppersmith [9] have shown that none of these optimal sets are associated to tilings.

REFERENCES

- [1] R. Ahlswede and G. O. H. Katona. Contributions to the geometry of Hamming spaces. *Discrete Math.*, 17:1–22, 1977.
- [2] A. Andoni and P. Indyk. Near-optimal hashing algorithms for approximate nearest neighbor in high dimensions. In *Proc. 47th Annual Symposium on Foundations of Computer Science*, pages 459–468, 2006.
- [3] A. E. Ashikhmin, G. D. Cohen, M. Krivelevich, and S. N. Litsyn. Bounds on distance distributions in codes of known size. *IEEE Trans. Info. Theory*, 51:250–258, 2005.
- [4] E. Berkovich. Method of and system for searching a data dictionary with fault tolerant indexing. United States Patent: 7,168,025, January 2007. Filed: 10/11/2001 (Appl. No. 09/973,792).
- [5] S. Y. Berkovich and E. El-Qawasmeh. Reversing the error-correction scheme for a fault-tolerant indexing. *The Computer Journal*, 43(1):54–64, 1999.
- [6] W. Bosma, J. Cannon, and C. Playoust. The Magma algebra system I: The user language. *J. Symb. Comp.*, 24:235–269, 1997. Software version: 2.13-7.
- [7] A. Broder. Identifying and filtering near-duplicate documents. In *Proceedings of the 11th Annual Symposium on Combinatorial Pattern Matching*, pages 1–10, 2000.
- [8] G. Cohen, S. Litsyn, A. Vardy, and G. Zémor. Tilings of binary spaces. *SIAM J. Discrete Math.*, 9(3):393–412, 1996.
- [9] Don Coppersmith and Victor Miller. Binary non-tiles. submitted for publication.
- [10] D. Dolev, Y. Harari, N. Linial, N. Nisan, and M. Parnas. Neighborhood preserving hashing and approximate queries. In *SODA '94: Proceedings of the fifth annual ACM-SIAM Symposium on Discrete Algorithms*, pages 251–259, 1994.
- [11] R. G. Gallager. *Information Theory and Reliable Communication*. John Wiley & Sons, New York, 1968.
- [12] A. Gionis, P. Indyk, and R. Motwani. Similarity search in high dimensions via hashing. In *Proceedings of the 25th VLDB Conference*, 1999.

³For $(t, n) = (6, 28)$, the three sets are $\langle 2^6 - 1 \rangle$ on $(0, 0.199)$, $\langle 2^{27} + 1, 2^5 + 3 \rangle$ on $(0.199, 0.25)$ and $\langle 2^{27} + 1, 2^9 + 2 \rangle$ on $(0.25, 0.5)$.

TABLE IV
OPTIMAL RIGHT-SHIFTED DOWN-SETS $R_{2^t, n}$ ($t \leq 5$).

t	n	p_{cross}	distance distribution function	$R_{2^t, n}$
1	1	0	$2(1+x)$	$\langle 1 \rangle$
2	2	0	$4(1+x)^2$	$\langle 2^2 - 1 \rangle$
3	3	0	$8(1+x)^3$	$\langle 2^3 - 1 \rangle$
4	4	0	$16(1+x)^4$	$\langle 2^4 - 1 \rangle$
	12	0.4560	$16 + 36x + 144x^2 + 60x^3$	$\langle 2^{11}, 2^3 + 1 \rangle$
	"	"	"	$\langle 2^{11}, 3 \cdot 2 \rangle$
	13	0.3929	$16 + 34x + 162x^2 + 44x^3$	$\langle 2^{12}, 2^2 + 1 \rangle$
	14	0.3333	$16 + 32x + 184x^2 + 24x^3$	$\langle 2^{13}, 2 + 1 \rangle$
	15	0.2826	$16 + 30x + 210x^2$	$\langle 2^{14} \rangle$
5	5	0	$32(1+x)^5$	$\langle 2^5 - 1 \rangle$
	12	0.4882	$32 + 100x + 368x^2 + 380x^3 + 144x^4$	$\langle 2^{11} + 1, 2^9 + 2 \rangle$
	"	"	"	$\langle 2^{11}, 2^{10} + 2 \rangle$
	13	0.4492	$32 + 98x + 378x^2 + 396x^3 + 120x^4$	$\langle 2^{12} + 1, 2^7 + 2 \rangle$
	14	0.3929	$2(1+x)(16 + 34x + 162x^2 + 44x^3)$	$\langle 2^{13} + 1, 2^3 + 3 \rangle$
	15	0.3333	$2(1+x)(16 + 32x + 184x^2 + 24x^3)$	$\langle 2^{14} + 1, 7 \rangle$
	16	0.2826	$2(1+x)(16 + 30x + 210x^2)$	$\langle 2^{15} + 1 \rangle$
	19	0.3333	$32 + 86x + 498x^2 + 408x^3$	$\langle 2^{18}, 2^{12} + 1 \rangle$
	20	0.2799	$32 + 84x + 512x^2 + 396x^3$	$\langle 2^{19}, 2^{11} + 1 \rangle$
	21	0.2724	$32 + 82x + 530x^2 + 380x^3$	$\langle 2^{20}, 2^{10} + 1 \rangle$
	22	0.2627	$32 + 80x + 552x^2 + 360x^3$	$\langle 2^{21}, 2^9 + 1 \rangle$
	23	0.2515	$32 + 78x + 578x^2 + 336x^3$	$\langle 2^{22}, 2^8 + 1 \rangle$
	24	0.2390	$32 + 76x + 608x^2 + 308x^3$	$\langle 2^{23}, 2^7 + 1 \rangle$
	25	0.2259	$32 + 74x + 642x^2 + 276x^3$	$\langle 2^{24}, 2^6 + 1 \rangle$
	26	0.2126	$32 + 72x + 680x^2 + 240x^3$	$\langle 2^{25}, 2^5 + 1 \rangle$
	27	0.1992	$32 + 70x + 722x^2 + 200x^3$	$\langle 2^{26}, 2^4 + 1 \rangle$
	28	0.1864	$32 + 68x + 768x^2 + 156x^3$	$\langle 2^{27}, 2^3 + 1 \rangle$
	"	"	"	$\langle 2^{27}, 3 \cdot 2 \rangle$
	29	0.1741	$32 + 66x + 818x^2 + 108x^3$	$\langle 2^{28}, 2^2 + 1 \rangle$
	30	0.1626	$32 + 64x + 872x^2 + 56x^3$	$\langle 2^{29}, 2 + 1 \rangle$
	31	0.1518	$32 + 62x + 930x^2$	$\langle 2^{30} \rangle$

- [13] L. H. Harper. Optimal assignment of numbers to vertices. *J. Soc. Ind. Appl. Math.*, 12:131–135, 1964.
- [14] P. Indyk and R. Motwani. Approximate nearest neighbor - towards removing the curse of dimensionality. In *Proceedings of the 30th Symposium on Theory of Computing*, pages 604–613, 1998.
- [15] F. Jaeger, A. Khelladi, and M. Mollard. On shorted cocycle covers of graphs. *J. Combin. Theory Ser. B*, 39:153–163, 1985.
- [16] R. M. Karp, O. Waarts, and G. Zweig. The bit vector intersection problem. In *Proc. 36th Annual Symposium on Foundations of Computer Science*, 1995.
- [17] T. Kløve and V. I. Korzhik. *Error Detecting Codes: General Theory and Their Application in Feedback Communication Systems*. Kluwer Academic Publishers, 1995.
- [18] André Kündgen. Minimum average distance subsets in the Hamming cube. *Discrete Math.*, 249:149–165, 2002.
- [19] Frank Ruskey. Combinatorial generation. online draft, 2003. available from <http://www.1stworks.com/ref/RuskeyCombGen.pdf>.■
- [20] L. Weng. Hashing system utilizing error correction coding techniques. United States Patent: 7,085,988, August 2006. Filed: 3/20/2003 (Appl. No. 10/393,096).

TABLE V
OPTIMAL RIGHT-SHIFTED DOWN-SETS $R_{64,n}$ ($t = 6$)

n	p_{cross}	distance distribution function	$R_{64,n}$
6	0	$64 + 384x + 960x^2 + 1280x^3 + 960x^4 + 384x + 64$	$\langle 2^6 - 1 \rangle$
12	0.487	$64 + 228x + 1092x^2 + 1020x^3 + 1692x^4$	$\langle 2^{11}, 2^{10} + 2^5, 3 \cdot 2^8 \rangle$
13	0.470	$64 + 226x + 1086x^2 + 1100x^3 + 1620x^4$	$\langle 2^{12}, 2^{10} + 2^4, 3 \cdot 2^8 \rangle$
14	0.439	$64 + 250x + 1002x^2 + 1508x^3 + 1032x^4 + 240x^5$	$\langle 2^{13} + 2^2, 2^{13} + 3, 2^3 + 5 \rangle$
15	0.391	$64 + 248x + 1024x^2 + 1592x^3 + 992x^4 + 176x^5$	$\langle 2^{14} + 3, 2^{10} + 2^2 \rangle$
16	0.333	$4(1+x)^2(16 + 32x + 184x^2 + 24x^3)$	$\langle 2^{15} + 3, 2^4 - 1 \rangle$
17	0.283	$4(1+x)^2(16 + 30x + 210x^2)$	$\langle 2^{16} + 3 \rangle$
19	0.36	$64 + 232x + 1184x^2 + 1784x^3 + 832x^4$	$\langle 2^{18} + 2, 2^{10} + 3 \rangle$
20	0.277	$64 + 224x + 1240x^2 + 1752x^3 + 816x^4$	$\langle 2^{19} + 2, 2^7 + 3 \rangle$
21	0.263	$64 + 216x + 1320x^2 + 1704x^3 + 792x^4$	$\langle 2^{20} + 2, 2^4 + 3 \rangle$
22	0.244	$64 + 208x + 1424x^2 + 1640x^3 + 760x^4$	$\langle 2^{21} + 2 \rangle$
23	0.242	$64 + 206x + 1426x^2 + 1680x^3 + 720x^4$	$\langle 2^{22} + 1, 2^{19} + 2 \rangle$
24	0.238	$64 + 204x + 1440x^2 + 1716x^3 + 672x^4$	$\langle 2^{23} + 1, 2^{17} + 2 \rangle$
25	0.231	$64 + 202x + 1466x^2 + 1748x^3 + 616x^4$	$\langle 2^{24} + 1, 2^{15} + 2 \rangle$
26	0.222	$64 + 200x + 1504x^2 + 1776x^3 + 552x^4$	$\langle 2^{25} + 1, 2^{13} + 2 \rangle$
27	0.212	$64 + 198x + 1554x^2 + 1800x^3 + 480x^4$	$\langle 2^{26} + 1, 2^{11} + 2 \rangle$
28	0.199	$2(1+x)(32 + 70x + 722x^2 + 200x^3)$	$\langle 2^{27} + 1, 2^5 + 3 \rangle$
"	0.25	$64 + 196x + 1616x^2 + 1820x^3 + 400x^4$	$\langle 2^{27} + 1, 2^9 + 2 \rangle$
29	0.186	$2(1+x)(32 + 68x + 768x^2 + 156x^3)$	$\langle 2^{28} + 1, 2^4 + 3 \rangle$
"	"	"	$\langle 2^{28} + 1, 3 \cdot 2^2 + 1 \rangle$
"	0.333	$64 + 194x + 1690x^2 + 1836x^3 + 312x^4$	$\langle 2^{28} + 1, 2^7 + 2 \rangle$
30	0.174	$2(1+x)(32 + 66x + 818x^2 + 108x^3)$	$\langle 2^{29} + 1, 2^3 + 3 \rangle$
31	0.163	$2(1+x)(32 + 64x + 872x^2 + 56x^3)$	$\langle 2^{30} + 1, 7 \rangle$
32	0.152	$2(1+x)(32 + 62x + 930x^2)$	$\langle 2^{31} + 1 \rangle$
35	0.1538	$64 + 182x + 2002x^2 + 1848x^3$	$\langle 2^{34}, 2^{28} + 1 \rangle$
36	0.1537	$64 + 180x + 2016x^2 + 1836x^3$	$\langle 2^{35}, 2^{27} + 1 \rangle$
37	0.153	$64 + 178x + 2034x^2 + 1820x^3$	$\langle 2^{36}, 2^{26} + 1 \rangle$
38	0.152	$64 + 176x + 2056x^2 + 1800x^3$	$\langle 2^{37}, 2^{25} + 1 \rangle$
39	0.151	$64 + 174x + 2082x^2 + 1776x^3$	$\langle 2^{38}, 2^{24} + 1 \rangle$
40	0.150	$64 + 172x + 2112x^2 + 1748x^3$	$\langle 2^{39}, 2^{23} + 1 \rangle$
41	0.148	$64 + 170x + 2146x^2 + 1716x^3$	$\langle 2^{40}, 2^{22} + 1 \rangle$
42	0.146	$64 + 168x + 2184x^2 + 1680x^3$	$\langle 2^{41}, 2^{21} + 1 \rangle$
43	0.144	$64 + 166x + 2226x^2 + 1640x^3$	$\langle 2^{42}, 2^{20} + 1 \rangle$
44	0.141	$64 + 164x + 2272x^2 + 1596x^3$	$\langle 2^{43}, 2^{19} + 1 \rangle$
45	0.139	$64 + 162x + 2322x^2 + 1548x^3$	$\langle 2^{44}, 2^{18} + 1 \rangle$
46	0.136	$64 + 160x + 2376x^2 + 1496x^3$	$\langle 2^{45}, 2^{17} + 1 \rangle$
47	0.133	$64 + 158x + 2434x^2 + 1440x^3$	$\langle 2^{46}, 2^{16} + 1 \rangle$
48	0.130	$64 + 156x + 2496x^2 + 1380x^3$	$\langle 2^{47}, 2^{15} + 1 \rangle$
49	0.127	$64 + 154x + 2562x^2 + 1316x^3$	$\langle 2^{48}, 2^{14} + 1 \rangle$
50	0.123	$64 + 152x + 2632x^2 + 1248x^3$	$\langle 2^{49}, 2^{13} + 1 \rangle$
51	0.120	$64 + 150x + 2706x^2 + 1176x^3$	$\langle 2^{50}, 2^{12} + 1 \rangle$
52	0.117	$64 + 148x + 2784x^2 + 1100x^3$	$\langle 2^{51}, 2^{11} + 1 \rangle$
53	0.114	$64 + 146x + 2866x^2 + 1020x^3$	$\langle 2^{52}, 2^{10} + 1 \rangle$
54	0.110	$64 + 144x + 2952x^2 + 936x^3$	$\langle 2^{53}, 2^9 + 1 \rangle$
55	0.107	$64 + 142x + 3042x^2 + 848x^3$	$\langle 2^{54}, 2^8 + 1 \rangle$
56	0.104	$64 + 140x + 3136x^2 + 756x^3$	$\langle 2^{55}, 2^7 + 1 \rangle$
57	0.101	$64 + 138x + 3234x^2 + 660x^3$	$\langle 2^{56}, 2^6 + 1 \rangle$
58	0.0978	$64 + 138x + 3330x^2 + 452x^3 + 112x^4$	$\langle 2^{57}, 2^3 + 1, 3 \cdot 2 \rangle$
"	0.1047	$64 + 136x + 3336x^2 + 560x^3$	$\langle 2^{57}, 2^5 + 1 \rangle$
59	0.0946	$64 + 136x + 3440x^2 + 344x^3 + 112x^4$	$\langle 2^{58}, 7 \rangle$
"	0.1179	$64 + 134x + 3442x^2 + 456x^3$	$\langle 2^{59}, 2^4 + 1 \rangle$
60	0.0920	$64 + 132x + 3552x^2 + 348x^3$	$\langle 2^{59}, 2^3 + 1 \rangle$
"	"	"	$\langle 2^{59}, 3 \cdot 2 \rangle$
61	0.0891	$64 + 130x + 3666x^2 + 236x^3$	$\langle 2^{60}, 2^2 + 1 \rangle$
62	0.0864	$64 + 128x + 3784x^2 + 120x^3$	$\langle 2^{61}, 2 + 1 \rangle$
63	0.0838	$64 + 126x + 3906x^2$	$\langle 2^{62} \rangle$